

172501-1

✓ ACTIVE


AMP | Mark II

TE Internal #: 172501-1

21 Position Housing, Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 5 mm / 7 mm [.197 in / .276 in]
Centerline, Mark II

[View on TE.com >](#)

Automotive Parts > Automotive Connectors > Automotive Housings

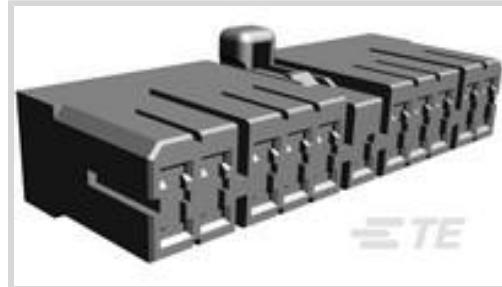

Number of Positions: 21

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 3 mm [.118 in]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Centerline (Pitch): 5 mm, 7 mm [.197 in, .276 in]

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device, Wire-to-Wire
Sealable	No
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	21
Number of Rows	2

Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Natural

Contact Features

Contact Size	3mm
--------------	-----

Contact Type	Receptacle
Mating Tab Width	3 mm [.118 in]

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA
Centerline (Pitch)	5 mm, 7 mm [.197 in] [.276 in]

Dimensions

Row-to-Row Spacing	3.1 mm, 6.2 mm [.122 in] [.244 in]
Product Width	64 mm [2.52 in]
Product Length	24 mm [.945 in]
Connector Height	14.5 mm [.571 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C [158 °F] [167 °F] [176 °F] [185 °F] [194 °F] [212 °F] [221 °F]
Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Method	Bag & Box
------------------	-----------

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance


For compliance documentation, visit the product page on TE.com >


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

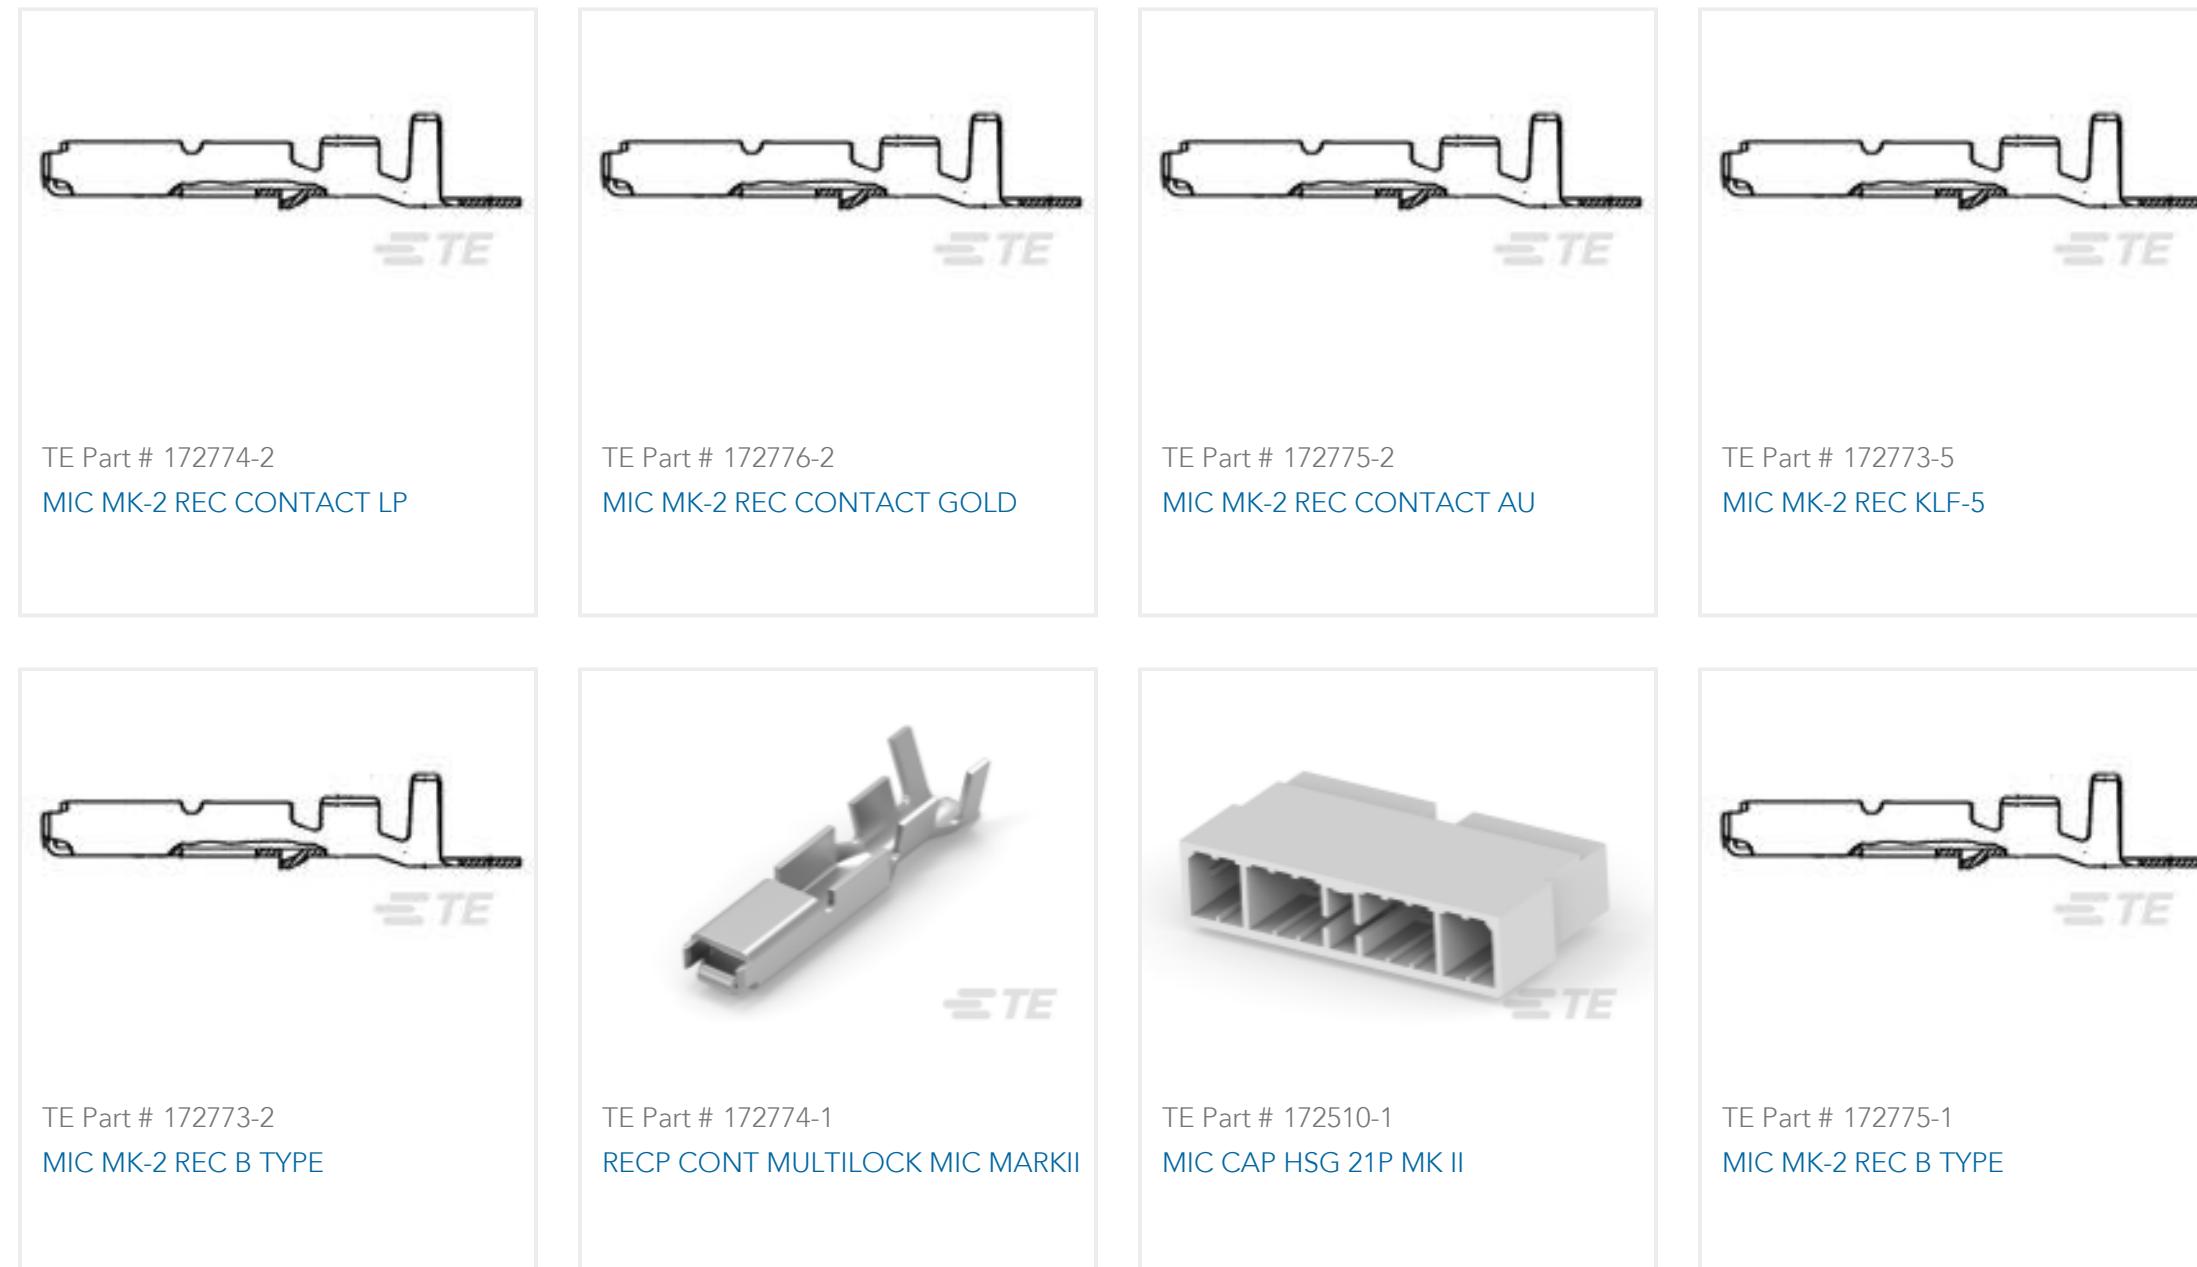


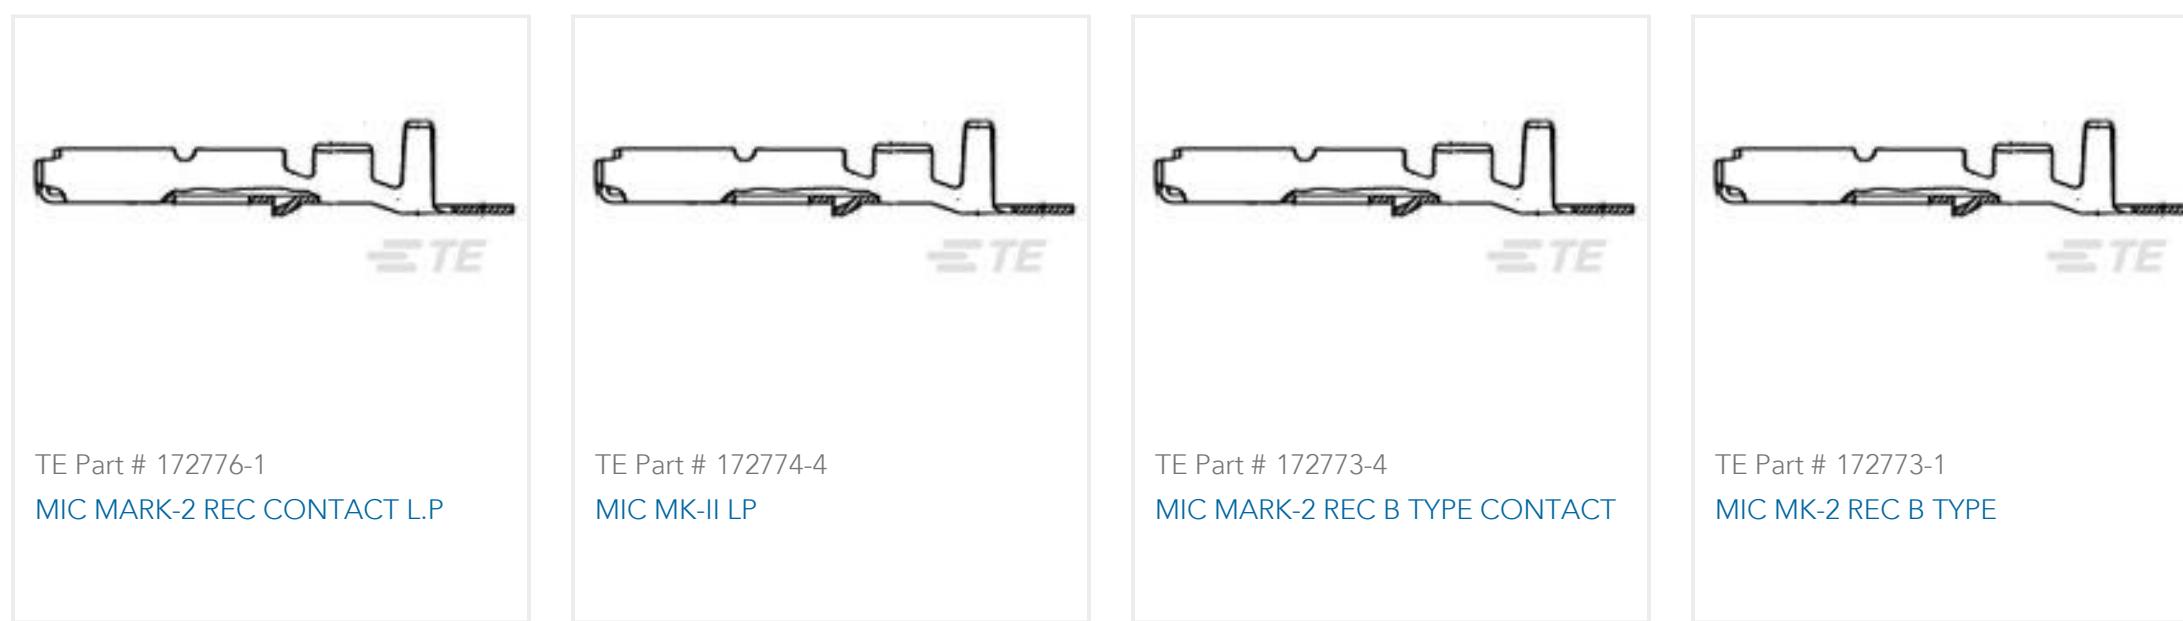


Also in the Series | Mark II

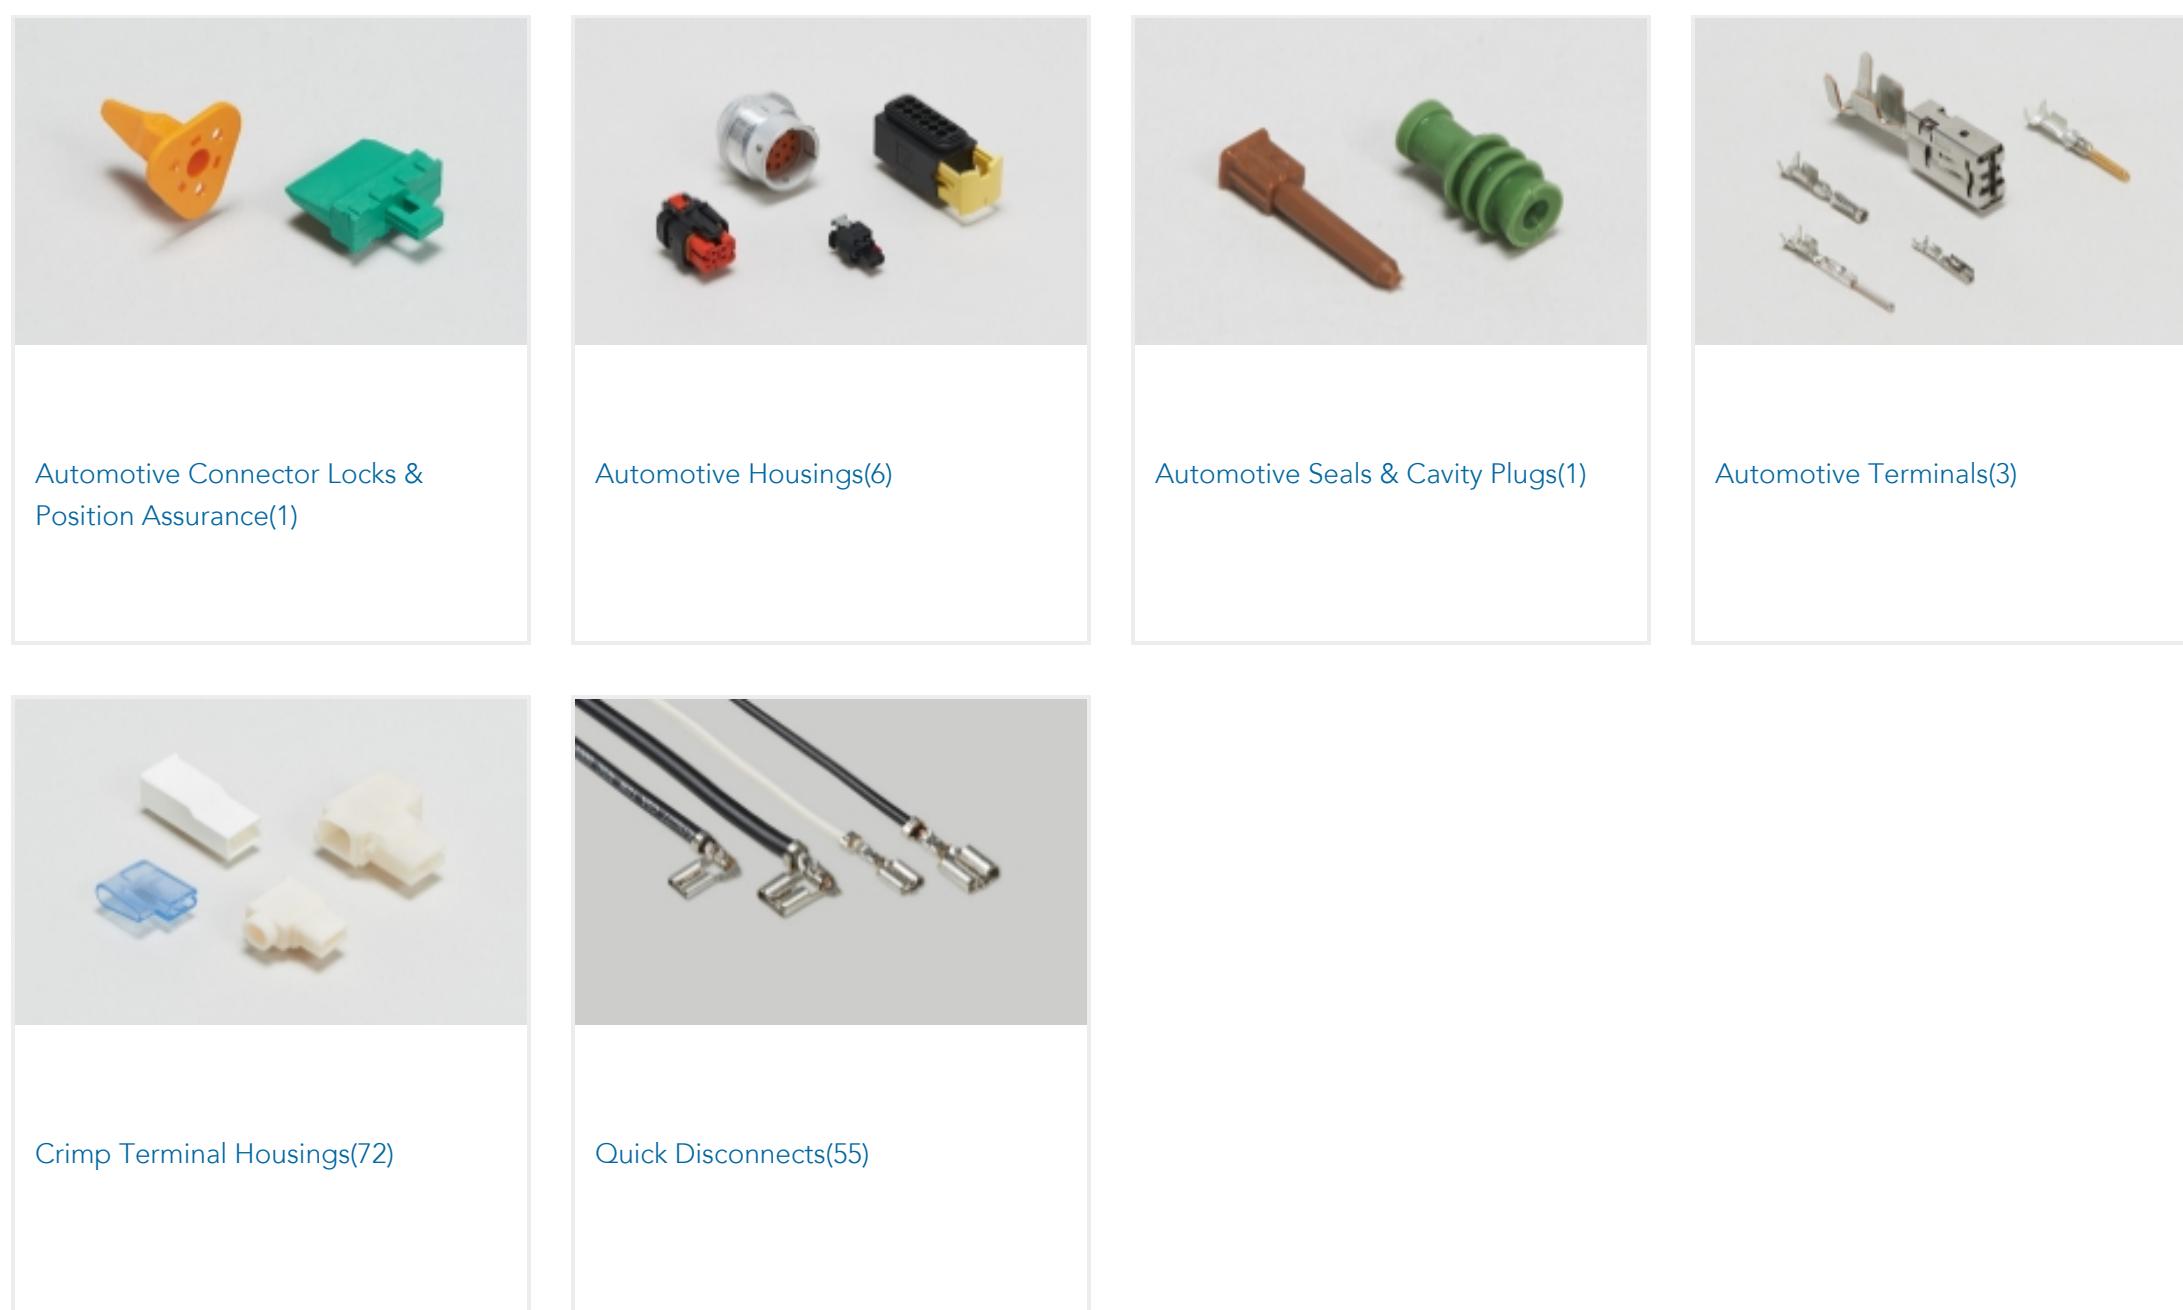

Customers Also Bought

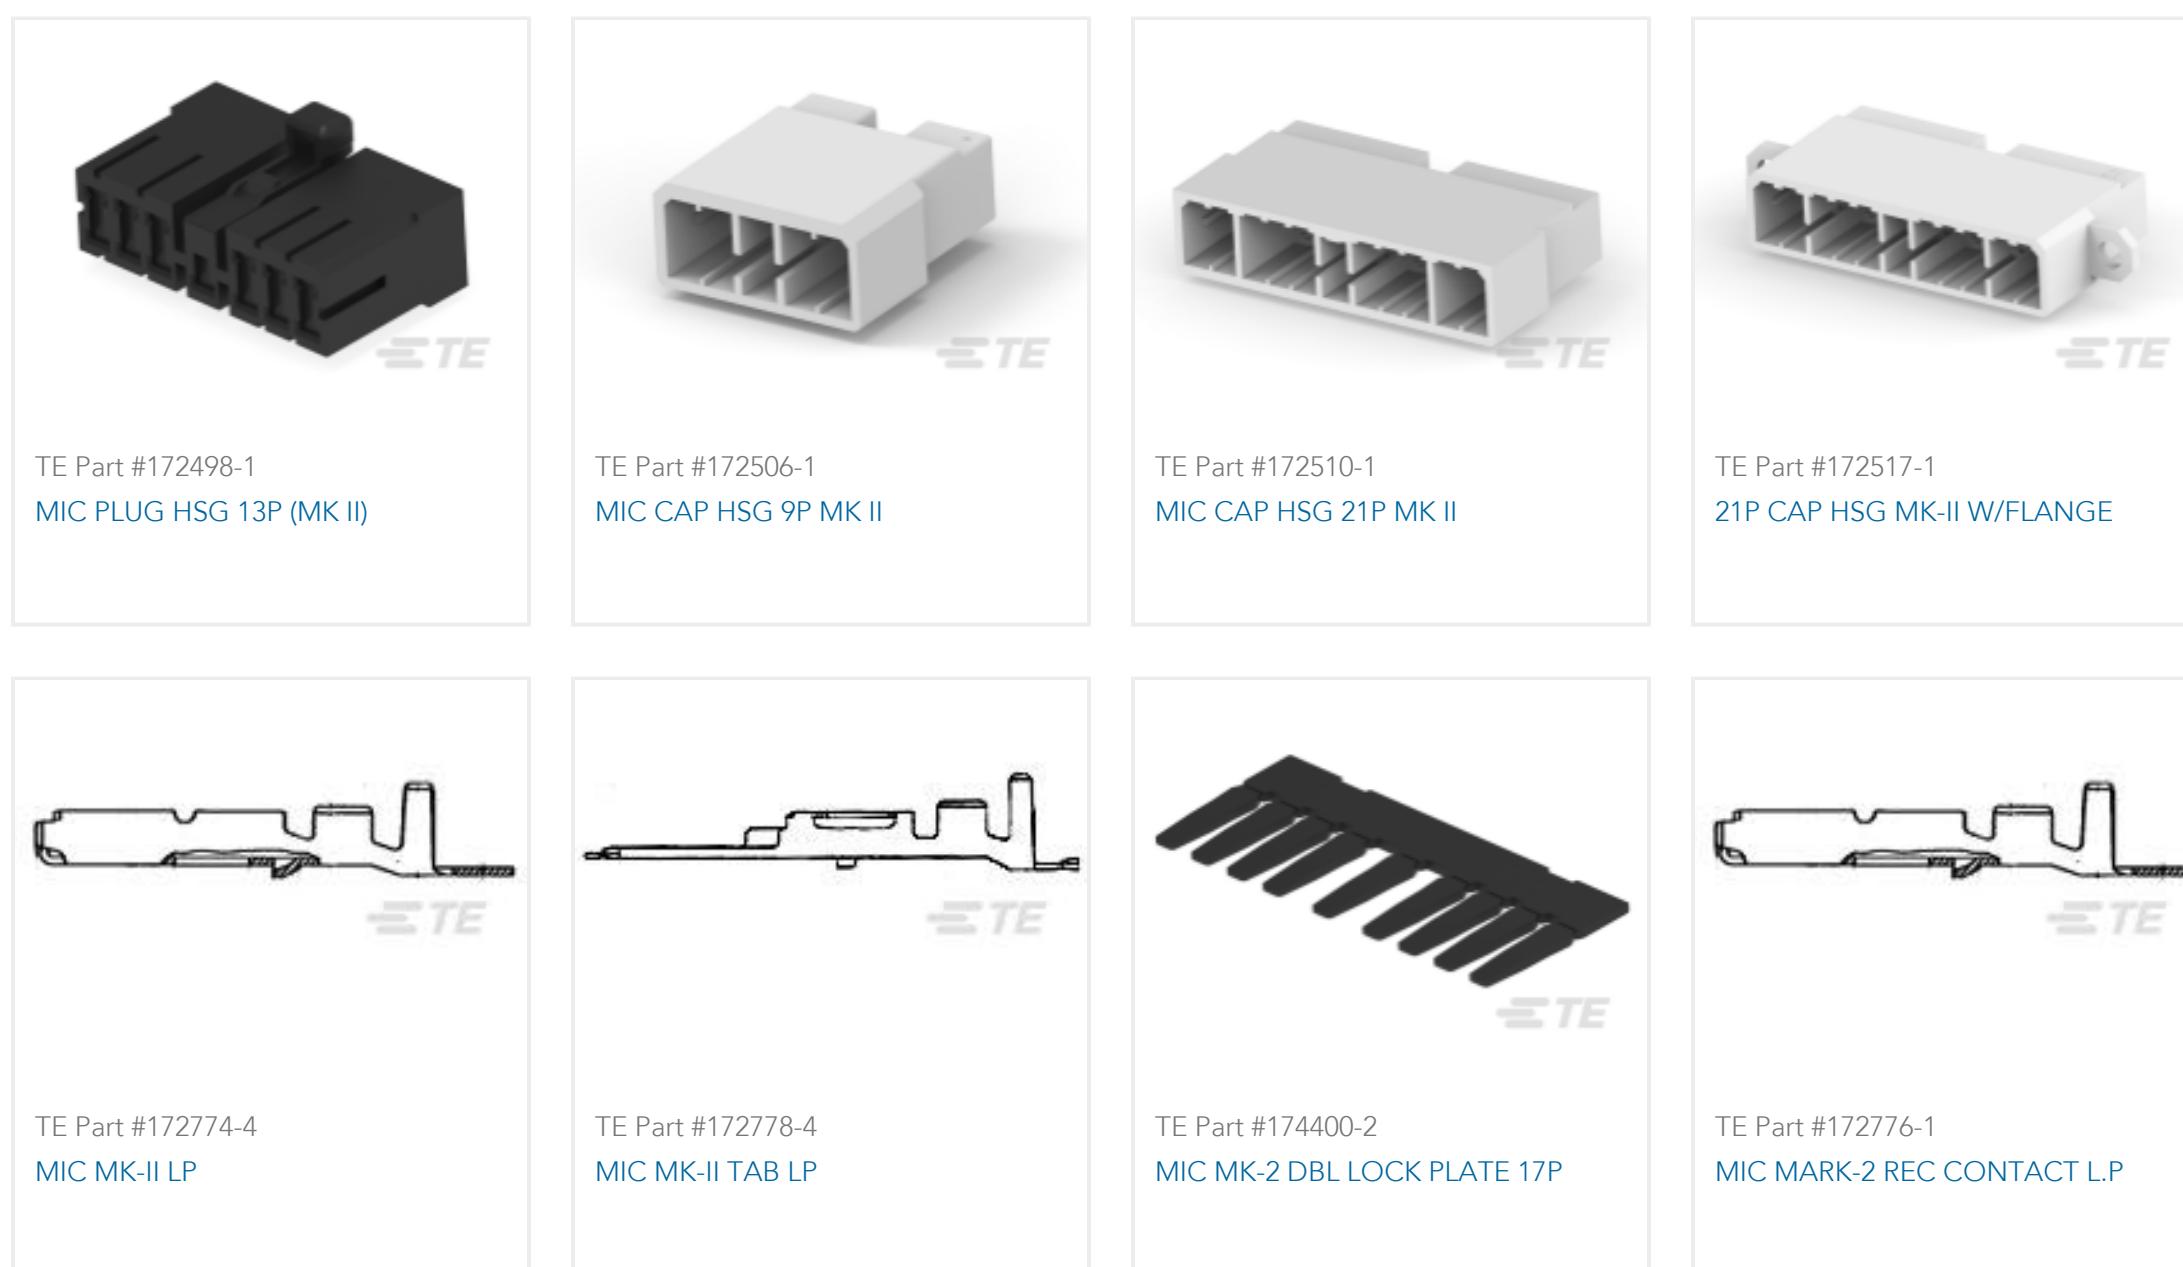

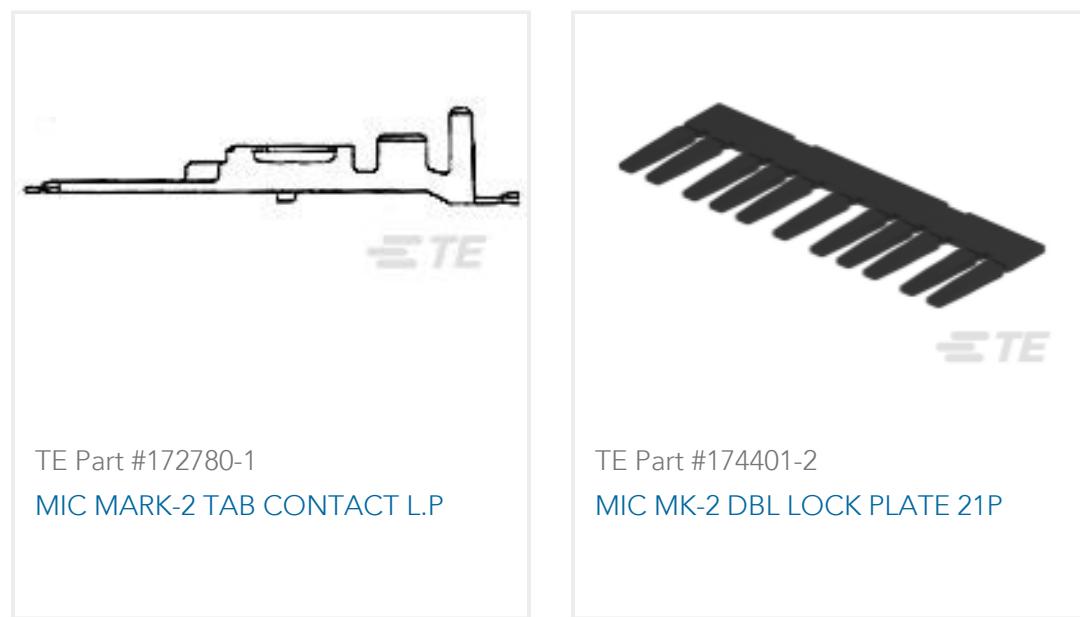

Documents

Product Drawings

[MIC MARK-2 PLUG HSG 21P](#)

English

CAD Files

Customer View Model

[ENG_CVM_172501-1_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_172501-1_O.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_172501-1_O.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Multi-Interlock Mark II Connector for Wire to Board Termination](#)

English

[Product Specification](#)

English

[Product Specification](#)

English

[Multi-Interlock Mark II Connector for Wire to Wire Termination](#)

English

Instruction Sheets

[Multi Interlock Connector Mark II](#)

English

[Multi Interlock Connector Mark II](#)

English

Agency Approvals

[Agency Approval Document](#)

English