AMP | AMPSEAL

TE Internal #: 776273-1

14 Position Housing, Housing for Female Terminals, Wire-to-Board,

4 mm [.157 in] Centerline, Sealable, Black, Wire & Cable, Power,

AMPSEAL

View on TE.com >



Automotive Parts > Automotive Connectors > Automotive Housings > AMPSEAL Receptacle Housings











Connector & Housing Type: Housing for Female Terminals

Number of Positions: 14

Sealable: Yes

Operating Temperature Range: -40 - 125 °C [-40 - 257 °F]

Number of Rows: 3

All AMPSEAL Receptacle Housings (31)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Board
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	14
Number of Rows	3
Electrical Characteristics	

250 VAC

Operating Voltage



Nominal Voltage Architecture	250 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	1
Contact Features	
Contact Size	1.3mm
Contact Type	Socket
Mating Pin Diameter	1.3 mm[.051 in]
Contact Current Rating (Max)	17 A
Mechanical Attachment	
Strain Relief	Without
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	4 mm[.157 in]
Dimensions	
Row-to-Row Spacing	4 mm[.157 in]
Product Width	33.6 mm[1.323 in]
Product Length	35.4 mm[1.394 in]
Connector Height	34.6 mm[1.362 in]
Usage Conditions	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
IP Rating	IP6K7, IP6K9K
UL Flammability Rating	UL 94V-0



Packaging Features

Packaging Quantity	56
Packaging Method	Tray
Other	

Serviceable	Yes
Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.5% in 27520126679) Decamethylcyclopentasiloxane (D5) (.5% in 27520126679) Octamethylcyclotetrasiloxane (D4) (.5% in 27519221955) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach



Compatible Parts























Also in the Series | AMPSEAL



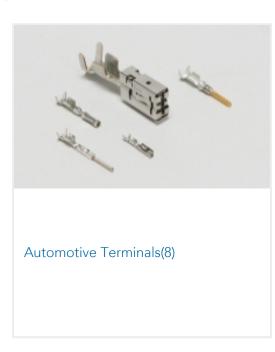




Customers Also Bought





TE Part #2-160121-1 SOLIS 12-10 RING M10, TAPE



TE Part #770854-3 CONTACT,AMPSEAL AU L/P



TE Part #CAT-AM78-CH8172

AMPSEAL Receptacle Housings





TE Part #5-1971845-8 8P, RAST 5 Tab Header, THV



TE Part #2138530-1 STRAIN RELIEF,14 POSITION AMPSEAL

TE Part #9622823001 ACW0219-0.35-4(NS)

TE Part #462433-7 SUPPORT, INSULATION

180DEG,COD 1

Documents

Product Drawings

14POS,AMPSEAL,SOC HSG ASSY,SLD,COD 1

English

CAD Files

Customer View Model

ENG_CVM_CVM_776273-1_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_776273-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_776273-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMPSEAL Connector Series

English

AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

14 Position Housing, Housing for Female Terminals, Wire-to-Board, 4 mm [.157 in] Centerline, Sealable, Black, Wire & Cable, Power, AMPSEAL



Product Specifications

Engineering Report

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English